

CATALOG NUMBER	
PROJECT NAME	TYPE
VOLTAGE	LAMPS

# EQUIWET 200

## T5HO & T8

### SPECIFICATIONS

- UL Listed Wet Location
- Fiberglass body
- Continuous poured, closed cell gasket
- Impact resistant lens
- Stainless steel mounting brackets for drill free mounting
- Polycarbonate latches standard, stainless steel latches optional
- Tamper proof screws optional
- Suitable for wall or ceiling mount
- 2, 4, and 8 foot enclosures
- 1, 2, and 3 lamp cross sections
- Narrow body available for 1 lamp unit (4 foot only)

#### Body Attributes

- IP 67 (Dust tight, immerse 1m, 30min)
- 5VA flame rating
- UL Listed / Wet Locations
- NSF Rated for food safety
- (f1) rated for outdoor use



### APPLICATIONS

- Indoor arenas
- Horse barns
- Parking garages
- Food processing and preparation
- Car washes with stainless steel latches
- Pool areas
- Hallways and stair wells

### ORDERING GUIDE:

#### WT

-

#### 2T5

-

#### UH

-

#### BB

#### SERIES

- WT - 4 FOOT UNIT
- WT2 - 2 FOOT UNIT
- WT8 - 8 FOOT UNIT

**ONE LAMP UNITS WILL  
COME STANDARD IN THE  
NARROW BODY**

#### LAMP TOTAL

- 1T5 - 1 F54 OR (F24 2 FT ONLY)
- 2T5 - 2 F54 OR (F24 2 FT ONLY)
- 4T5 - 4 F54 (8 FOOT ONLY)
- 1T8 - 1 F32 OR (F17 2 FT ONLY)
- 2T8 - 2 F32 OR (F17 2 FT ONLY)
- 3T8 - 3 F32 OR (F17 2 FT ONLY)
- 4T8 - 4 F32 (8 FOOT ONLY)
- 6T8 - 6 F32 (8 FOOT ONLY)

#### BALLAST CONFIG

- UL - 120/277 T8 LBF
- UR - 120/277 T8 NBF
- UH - 120/277 T8 HBF
- UH - 120/277 T5HO
- 4H - 480v (T5)

#### OPTIONS

- BB - BATTERY BACKUP - CALL FACTORY FOR CONFIG
- E - ENHANCED ALUMINUM REF
- FITTING - HEYCO FITTING FOR CORD
- CORD - CORD INSTALLED WITH FITTING SPECIFY LENGTH
- SS - STAINLESS STEEL LATCHES
- OS - OCCUPANCY SENSOR

CATALOG NUMBER	
PROJECT NAME	TYPE
VOLTAGE	LAMPS


# EQUIWET 200

## T5HO & T8

### MOUNTING OPTIONS

- Drill-free stainless steel mounting brackets come standard with each unit
- Stainless brackets can attach to 1/4 in. all thread.
- Dual point mounting optional. Body has 3/4 in hole template for easy location and drilling

### EquiWet 200 Mounting Brackets

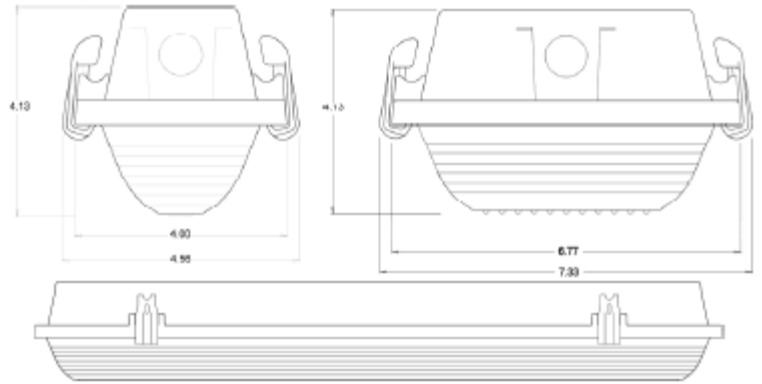


4 FOOT UNIT - 51.25 IN. LONG  
8 FOOT UNIT - 99.5 IN. LONG  
2 FOOT UNIT - 27.75 IN. LONG

### WT-2T5-UH

Coefficients of Utilization

plc=>	0.20																		
pcc->		0.80																	
pw->	0.70	0.50	0.30	0.10	0.70	0.50	0.30	0.10	0.50	0.30	0.10	0.50	0.30	0.10	0.00	0.00	0.00	0.00	
RCR																			
0	73	73	73	73	71	71	71	71	67	67	67	64	64	64	60	60	60	60	
1	85	82	58	55	63	60	57	54	56	54	52	53	51	49	47	47	47	47	
2	59	53	48	44	57	51	47	43	48	44	41	46	42	40	37	37	37	37	
3	53	46	40	35	51	44	39	35	42	37	34	40	36	33	30	30	30	30	
4	48	40	34	29	46	39	33	29	37	32	28	35	31	27	25	25	25	25	
5	44	36	30	25	43	35	29	25	33	28	24	31	27	23	22	22	22	22	
6	41	32	26	22	39	31	25	21	30	25	21	28	24	20	19	19	19	19	
7	38	29	23	19	36	28	23	19	27	22	18	26	21	18	16	16	16	16	
8	35	26	21	17	34	26	20	17	24	20	16	23	19	16	14	14	14	14	
9	33	24	19	15	32	23	18	15	22	18	15	21	17	14	13	13	13	13	
10	31	22	17	13	30	22	17	13	21	16	13	20	16	13	12	12	12	12	

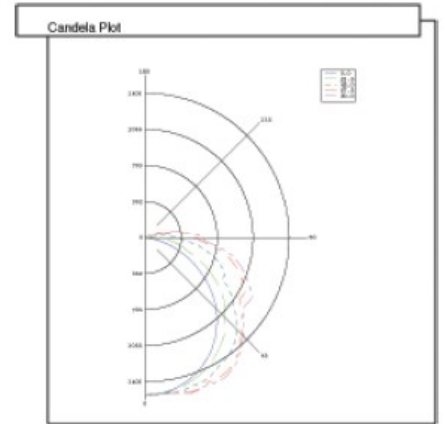

Luminaire Properties	
Number of Lamps:	2
Lumens Per Lamp:	5000
Input Watts:	105
Distribution:	Direct
Symmetry:	Quadrilateral
Photometric Type:	Type C
Luminous Shape:	Rectangle
Unites:	Feet
Luminous Dimensions:	
0-180 Axis:	4.3
90-270 Axis:	0.55
Height:	0.14

Zonal Lumen Summary			
Zone	Lumens	% Lamp	%Fixture
0-30	1261	13	20
0-40	2127	21	34
0-60	3970	40	64
0-90	5878	59	94
90-120	361	4	6
90-150	369	4	6
90-180	369	4	6
0-180	6247	62	100