

CATALOG NUMBER	
PROJECT NAME	TYPE
VOLTAGE	LAMPS

## SPECIFICATIONS

- 95% Enhanced Aluminum, Roll Formed Reflectors
- Fiber Glass Reinforced Polyester Body
- Polycarbonate or Clear Acrylic Lens
- Closed Cell Polyurethane Gasket
- High Ambient and -20°F Cold Start Ballast Standard
- UL and cRLus Wet Listed
- NSF/ANSI Standard 2 - Splash Zone
- NEMA 4x Indoor or Outdoor use
- IP67 Certified - Dust and Liquid protected
- RoHS Compliant
- High Pressure Hose Test Passed at 1500 PSI
- 4 lamp T5 & 6 Lamp T8 up to 104°F
- 6 lamp T5 up to 77°F

## EQUIWET 100

Wet Location HIGH CEILING



## APPLICATIONS

- Riding Arenas
- Retail
- Distribution
- Warehouse
- Retail
- Distribution
- Manufacturing Plant
- Gymnasium
- Parking Garage

## ORDERING GUIDE:

<u><b>BL</b></u>	-	<u><b>4T8</b></u>	-	<u><b>UH</b></u>	-	<u><b>LI</b></u>
SERIES		LAMP TOTAL		BALLAST CONFIG.		OPTIONS
BL – EQUIWET 100 HIGH CEILING		4T5-4F54 6T5-6F54 4T8-4F32 6T8-6F32		UL – 120/277 T8 LBF UR – 120/277 T8 NBF UH – 120/277 T8 HBF UH – 120/277 T5 HBF 4H – 347/480V (T5/T8)		LI – LAMPS INSTALLED CA – CLEAR ACRYLIC LENS PC – POLYCARBONATE LENS OS – OCCUPANCY SENSOR INSTALLED CORD – SPECIFY CORD LENGTH PLUG – SPECIFY PLUG TYPE GR – ADJUSTABLE CABLE HANGERS, SPECIFY LENGTH

CATALOG NUMBER	
PROJECT NAME	TYPE
VOLTAGE	LAMPS

# EQUIWET 100

Wet Location HIGH CEILING

## MOUNTING OPTIONS


- V-Clips for dual point chain or cable hanging




### Available Accessories

- Conduit hub - Single hub for center to accept a 3/4" pendant. Also available, hub wrench for installation
- Cable - Includes 2 adjustable cable hangers


## FIXTURE DIMENSIONS:

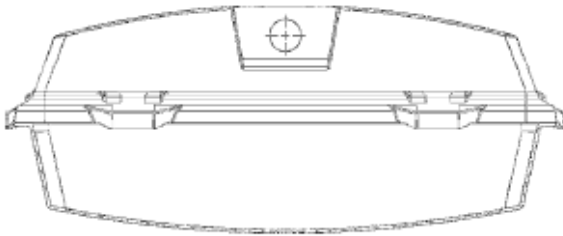

Depth: 5.95"

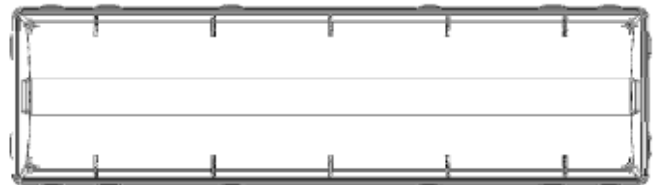

Width: 14.61"

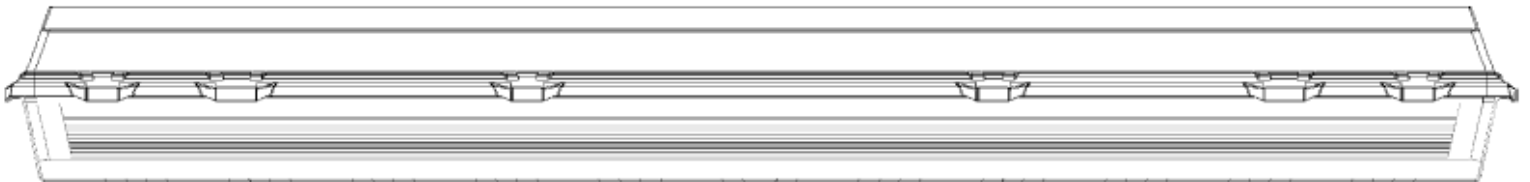

Length: 51.81"